borg& overström







A design for flexibility The range was created with an innate flexibility allowing it to flourish in all given environments – from boardroom to sports hall. Its compact size, large dispense and flexible water options position it as the premium solution.





Power requirements Hertz 50/Volts 220-240 Max power consumption Chilled & Ambient 100W Chilled & Ho t 600W Chilled & Sparkling 150W Chilled, Hot & Sparkling 650W Chilled temperature Min 2°C/Max 11°C Hot temperature Max 92°C Throughput litres per hour Chilled 22/Hot 6 Dimensions Floorstanding Countertop Internal Dispense height WxDxH 320x470x1 325mm 320x470x4 15mm 280x330x830 mm 255 mm



Key Features


- Touch panel button controls
- Integrated cup dispenser (Floorstanding option only)
- High capacity, auto-lit dispense area
- Premium POU dispenser
- Floorstanding or counterop
- Chilled, ambient, hot and sparkling

Available accessories

- Sparkling Refill (CO 2 E290)
- CO , Regulator with Gauge
- Sanitisation Kit
- Install Kit with Filter
- W aste Kit with Level Sensor (Floorstanding option only)
- Blue Tint Cups





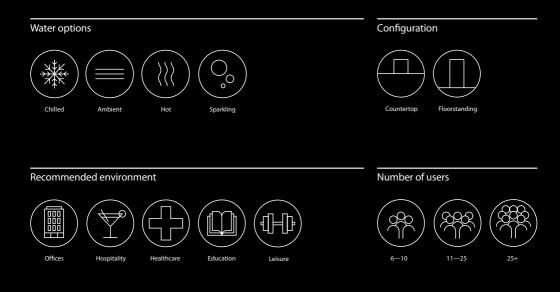

b4 Models

Direct Chill, Countertop, Chilled, Ambient—103210 Direct Chill, Countertop, Chilled, Hot—103215 Direct Chill, Countertop, Chilled, Sparkling—103310 Direct Chill, Countertop, Chilled, Hot, Sparkling—103410 Base Cabinet—103910

Water system



Direct Chill

Borg & Overström Direct Chill utilises innovative technology to chill water instantly. We recommend this system for more demanding environments because of its optimum dispense performance and unrivalled hygienic qualities. Superior to the gravity fed Reservoir system, Direct Chill technology chills water on demand for the ultimate drinking experience.

Distributed by Speak to a Water Expert

We're here to answer all your questions. sales@expresswatercoolers.co.uk +44 (0) 161 747 7400

Express Water Coolers 102a Higher Road, Urmston, Manchester, M41 9AP www.expresswatercoolers.co.uk



borg& overström