# borg& overström







A design like no other The b5 range straddles the line between high-end functionality and ultra-modern design. The unique streamlined design of this range will bring sophistication to any environment.



Power requirements Hertz 50/Volt s 220-240 Max power consumption C hilled & Ambient1 00W Chilled, Ambient & Sparkling 140 W Chilled, Ambient & Hot 900W Chilled, Hot & Sparkling 940W Chilled temperature Min 2°C/Max 11°C Hot temperature Max 92°C Throughput litres per hour Chilled 22/Hot 6 DimensionsWxFloorstanding52 0Dispense height250

WxDxH 52 0x415x1310mm 250 mm




### Key Features

- Optimum height for interaction
- Fully open lit dispense area
- Shrouded faucet for hygienic protection
- Compact alar med drainage system
- Built in leak detector

#### Available accessories

- Wall Bracket Set
- Sparkling Refill (CO 2 E290)
  CO 2 Regulator with Gauge
  Sanitisation Kit
- Install Kit with Filter
- Blue Tint Cups



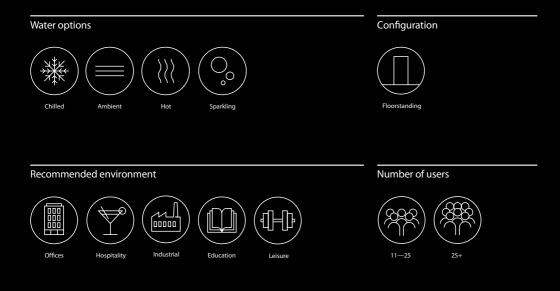

#### b5 Models

Direct Chill, Floorstanding, Chilled, Ambient—10152 0 Direct Chill, Floorstanding, Chilled, Ambient, Sparkling —101 53 0 Direct Chill, Floorstanding, Chilled, Ambient, Hot—10 15 40 Direct Chill, Floorstanding, Chilled, Hot, Sparkl ing—101 55 0

#### Water system



Direct Chill

Borg & Overström Direct Chill utilises innovative technology to chill water instantly. We recommend this system for more demanding environments because of its optimum dispense performance and unrivalled hygienic qualities. Superior to the gravity fed Reservoir system, Direct Chill technology chills water on demand for the ultimate drinking experience.

## Distributed by Speak to a Water Expert

We're here to answer all your questions. sales@expresswatercoolers.co.uk +44 (0) 161 747 7400

Express Water Coolers 102a Higher Road, Urmston, Manchester, M41 9AP WWW.expresswatercoolers.co.uk



borg& <u>overstr</u>öm