

borg &
overström



Distinctive
by design.



t1

borg &
overström

Advanced performance. Minimalist design.

The T1 is the ideal solution for busy workplaces where space may be at a premium. With advanced dispensing features packaged in a minimal and contemporary design, the T1 will complement even the smallest communal area or kitchenette.



Distinctive
by design.



t1

High-capacity dispensing

The T1 eliminates the need for single-use plastic bottles with high-capacity dispensing. It delivers 50 litres per hour of chilled, ambient, and sparkling drinking water, making refilling reusable vessels such as drinking bottles fast and convenient.

Cutting-edge UV protection

As an option, the T1 can be pre-fitted with Viovand[®], a mercury-free, chemical-free and energy-efficient LED-UV water purification system. For complete peace of mind, it also includes additional hygiene features via Borg & Overström's Totality[™] methodology.

Next-generation ProCore[™]

Under the counter is a compact powerhouse. ProCore[™] is a low-maintenance next-generation water dispensing system. In addition to being energy-efficient, it's fitted with the new eco R290 refrigerant gas.

Plug and play installation

There are no fiddly wires to connect with the T1. The plug and play USB 3 connector makes this tap super easy to install.

Countertop convenience

This integrated tap system can be positioned over a sink or combined with a stylish circular drip tray which complements the design of the tap. The drip tray can either be plumbed into mains waste or used with the Borg & Overström alarmed waste kit.

Minimal yet durable design

Beneath the minimalist, contemporary exterior lies an innovative water dispensing system built for durability and efficiency. The tap is PVD coated for a high-end yet durable finish, while the undercounter cabinet is colour-coated GreenCoat[®] steel.

Low energy consumption

The T1 is consistently energy efficient, making it both economical and eco-friendly. This dynamic integrated tap system is lean and economical, with absolutely no sacrifice to output and quality.

Ventilation kit included

A ventilation kit is included with this system. It's easy to install and increases the efficiency of the ProCore[™] by allowing a continuous cycle of cool air.



Distinctive
by design.

borg &
overström

Water system



Dry Chill*

Configurations



Integrated Tap

Water options



Chilled



Ambient



Sparkling

Tap finishes



Steel



Black





Distinctive
by design.



EXPRESS
WATER COOLERS

t1

Specifications	T1 ProCore	Dispense options	Max power consumption	Steel	Black	Steel ECO-UV	Black ECO-UV
Tap dimensions W42xD163xH385mm	Power requirements Hertz 50/Volts 230-240	Chilled & Ambient	140W	741010	741000	741030	741020
Dispense height 310mm	Water system Dry Chill*	Chilled & Sparkling	200W	741050	741040	741070	741060
ProCore™ dimensions W320xD375xH335mm	Chilled temperature Min 2°C/Max 11°C	Chilled, Sparkling & Ambient	200W	741090	741080	741110	741100
Simple-fit Ventilation Base W322xD431xH60mm (Includes 20mm overhang)	Throughput flow rate 50 litres per hour (LPH) 60 500ml bottles per hour (BPH)						

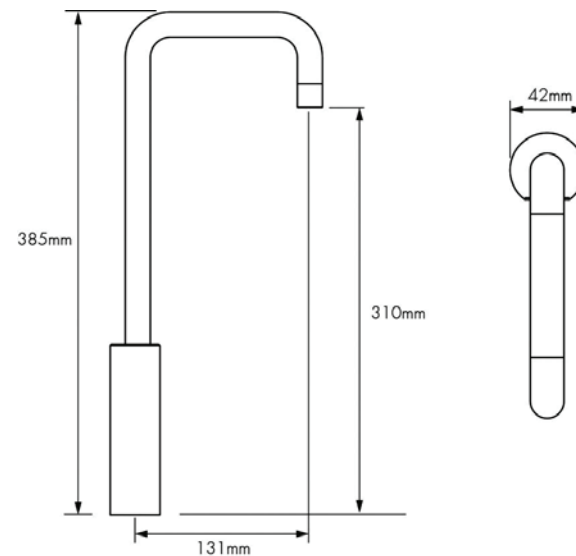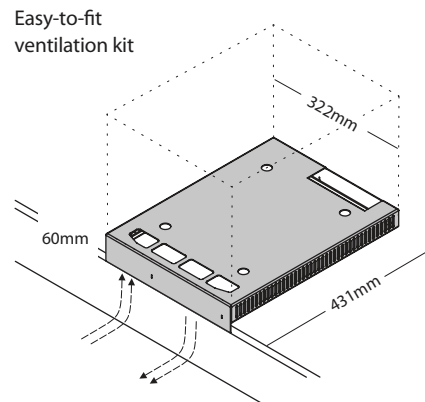

Distinctive
by design.